

ASSA ABLOY is the global leader in door opening solutions, dedicated to satisfying end-user needs for security, safety and convenience



Please Note:

This document is provided as a dimensional reference and should not be printed as a drilling template unless it can be correctly scaled to 100% by your printer.

ASSA ABLOY Australia Pty Limited
235 Huntingdale Road,
Oakleigh Victoria, 3166
Australia

info.au@assaabloy.com
assaabloy.com.au

ASSA ABLOY New Zealand Ltd.
6 Armstrong Road
Albany, North Shore City, 0632
New Zealand


info.nz@assaabloy.com
assaabloy.co.nz

Door and pull preparation template


Important Note
Drill hole from both sides of door to prevent splintering of door face.

Tools Required

- Ø54mm Hole saw
- Ø25mm Spade bit
- Ø2mm Drill bit
- Power drill
- 25mm Chisel
- Pencil
- Ruler or tape measure
- Phillips head screw driver












Please ensure that all necessary safety precautions are taken when installing this product.

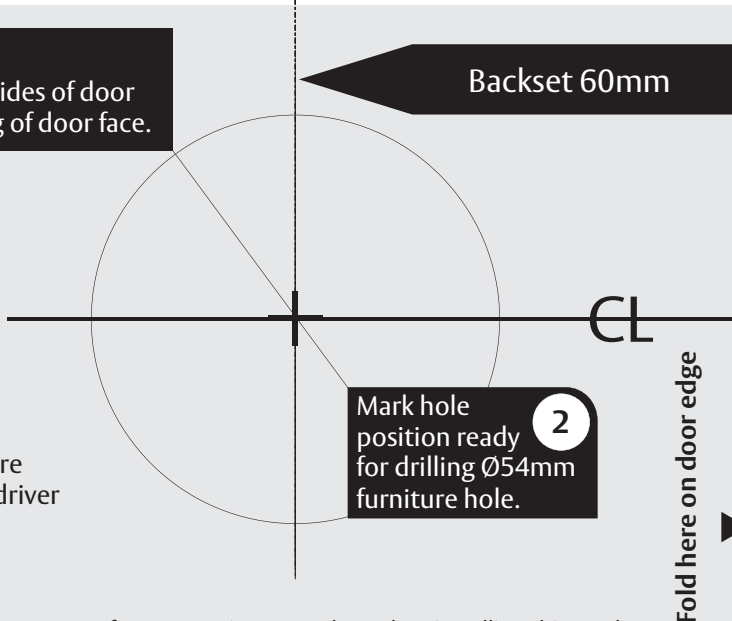

Mark hole position ready for drilling Ø54mm furniture hole.

Find centre of door edge and mark ready for drilling Ø25mm latch hole.

Passage Set door preparation and pull installation (steps 1 - 9)

<p>1</p>  <p>900mm</p> <p>Mark line on the door face approximately 900mm from the floor. Tear along perforated line on template. Fold page along --- dashed line and place fold on door edge. Align CL with marked line on door face.</p>	<p>2</p>  <p>1 2</p> <p>1. Find centre of door edge and mark ready for drilling Ø25mm pull hole. 2. Mark hole position ready for drilling Ø54mm furniture hole both sides of door.</p>	<p>3</p>  <p>Drill Ø2mm pilot hole squarely through the door.</p>	<p>4</p>  <p>Ø54 mm Ø25 mm</p> <p>2 1</p> <p>1. Drill Ø25mm pull hole to depth of 70mm, ensure hole is drilled squarely. 2. Drill a Ø54mm furniture hole, from both sides of door to prevent splintering.</p>	<p>5</p>  <p>Insert pull into Ø25mm hole, mark around latch face plate.</p>
<p>6</p>  <p>Chisel out recess to suit face plate. Face plate must be flush with door face.</p>	<p>7</p>  <p>Insert pull into recess. Mark and drill 2mm pilot holes, and affix with screws provided.</p>	<p>8</p>  <p>Press the retractable door pull button to release it. (Press it to reset).</p>	<p>9</p>  <p>Pull on the retractable door pull to remove door from cavity.</p>	<p>Fold here on door edge</p>

LOCKWOOD GUARANTEE

ASSA ABLOY Australia Pty Limited ("ASSA ABLOY") warrants its Lockwood products against defects in workmanship and materials, subject to the limitations and exclusions set out in this Warranty. If, within the normal working life of a product, it is found to be defective, and none of the limitations and exclusions set out in this Warranty apply, ASSA ABLOY will supply the same or equivalent product free of charge. This is the only remedy granted by ASSA ABLOY under this Warranty. **Limitations** All electrical and electronic components used in ASSA ABLOY's Lockwood range of products (excluding batteries) are guaranteed for a period of 12 months from the date of proof of purchase, unless stated otherwise. **Exclusions** This Warranty does not cover: 1. Damage to or malfunction or failure of the Lockwood product caused or contributed to by: (a) improper installation or failure to follow fitting instructions; (b) improper maintenance; (c) fair wear and tear; (d) any modification or repair which has not been authorized by ASSA ABLOY; (e) use of substitute or replacement parts or cylinders other than genuine ASSA ABLOY parts or cylinders; or (f) use of batteries other than those specified by ASSA ABLOY. 2. The cost of: (a) removal and/or replacement of the Lockwood product; (b) freight and/or travelling time; (c) replacement batteries; or (d) any modification or repairs to a Lockwood product, unless authorised by ASSA ABLOY. 3. Damage to or deterioration of the plated finishes Florentine Bronze, Architectural Bronze, Polished Brass, Gold and Satin Brass, which are classified as soft finishes, and are subject to deterioration under some environmental conditions. 4. Damage caused by corrosion when the Lockwood product is used in a corrosive environment. 5. Personal injury, property damage or economic loss, however caused.

Passage set installation (steps 10 - 15)

10

Furniture assembly.

11

Assembly shows both sides interlocking.

12

Assemble as shown with screw holes vertical.

13

If door is less than 33mm thick use packers. Fit the packers to the inner faces of the furniture, against the door face.

14

Align screws vertically and affix through furniture.

15

Slide door using finger grip.

Passage set strike installation (steps 16 - 21)

16

Mark a horizontal line on the door (this line passes through the centre of the 54mm hole). Extend this line along the face of the door jamb.

17

Align the pip on strike plate with the line on the jamb (horizontal)
Align the pip on the strike plate with the centre of the pull button (vertical).

18

Mark around strike plate.

19

Chisel out recess for strike plate. Strike plate must be flush with door jamb.

20

Drill 2mm pilot holes.

21

Affix with screws provided.