




FLEXIROL STRAIGHT SLIDING FOR TOP-HUNG TIMBER, METAL OR GLASS DOORS

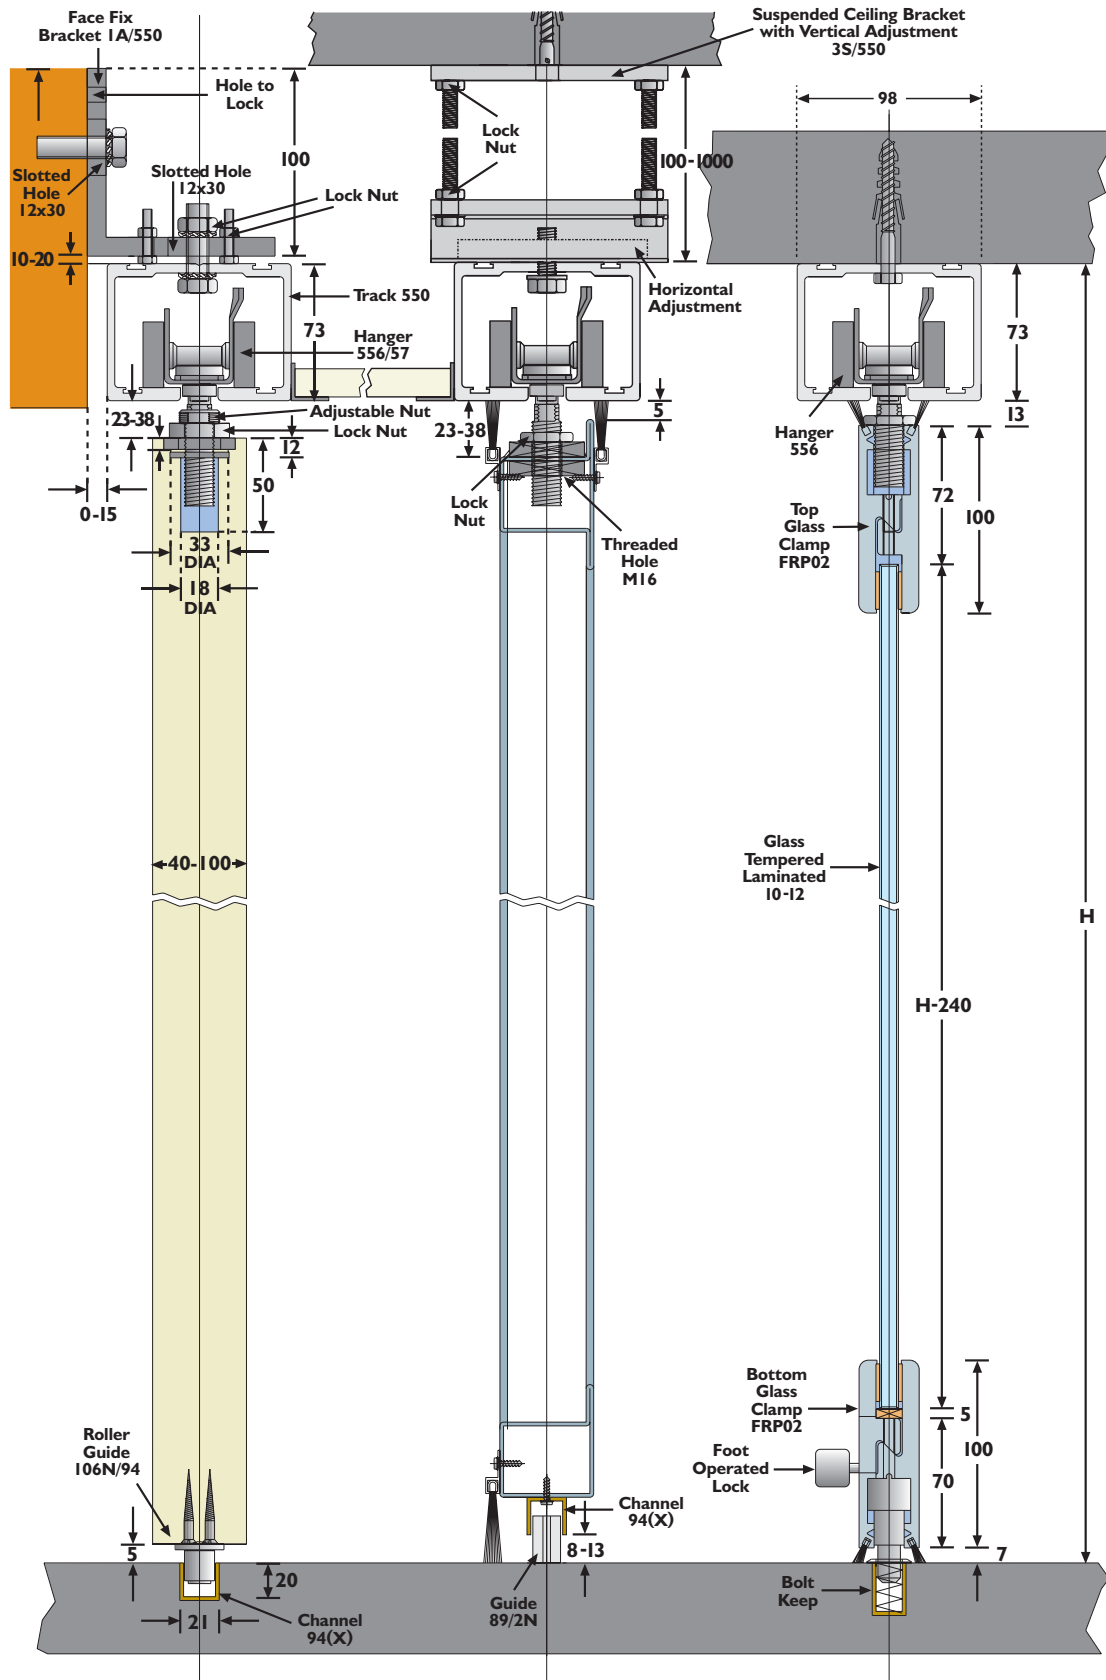

CAPACITY

- Max. door weight: 500kg (556 hanger)
- Max. door height: 6000mm - timber or metal framed
 2600mm-10mm BS6206 toughened glass
 4000mm-12mm BS6206 toughened glass
- Max. door width: 6000mm - timber or metal framed
 1300mm-10mm BS6206 toughened glass
 1500mm-12mm BS6206 toughened glass
- Door thickness: 40mm-100mm - timber or metal framed
 10mm or 12mm - BS6206 toughened glass

APPLICATIONS

Henderson straight sliding Flexirol is ideally suited to hotels, conference centres, shop-fronts, showrooms or any site that requires high performance and attractive finish.

DOOR TYPES

- Timber doors, metal doors of either angle frame or box section and aluminium extrusion.
 BS6206 toughened glass panels of either 10 or 12mm thickness.

Note: when using glass clamps in combination with protective coatings for glass surfaces such as Clear Shield, ensure that the glass surface to be clamped is not treated with the Clear Shield coating.

TECHNICAL INFORMATION

Track:	550 (see components section for range of finishes)
Brackets:	Face fix 1A/550 Soffit fix 3S/550
Hangers:	Metal doors 556 Timber doors 556/57 - concealed fixing Timber doors 556/52 - angle plate fixing
Glass Profiles:	Glass profile FRP02 - (see Technical Department)
Guides:	Timber and metal doors 89/2N Timber doors 106N/94 Metal doors 104N/94 Metal doors, extended version 104NX/94
Guide Channel:	Brass 94 Aluminium 94X Aluminium threshold/guide channel 94T (refer to page 4)
Accessories:	Flush pull 400 Flush bolt 333/454 Narrow flush bolt and keep F3715 & F3734 Trackstop HH3/301 Sliding door lock for glass panels 618SA (10mm & 12mm glass only - see page 9) Brush profiles (see page 53) Handle sets (see page 33)

