




FLEXIROL 135° MULTIDIRECTIONAL SYSTEM FOR GLASS DOORS

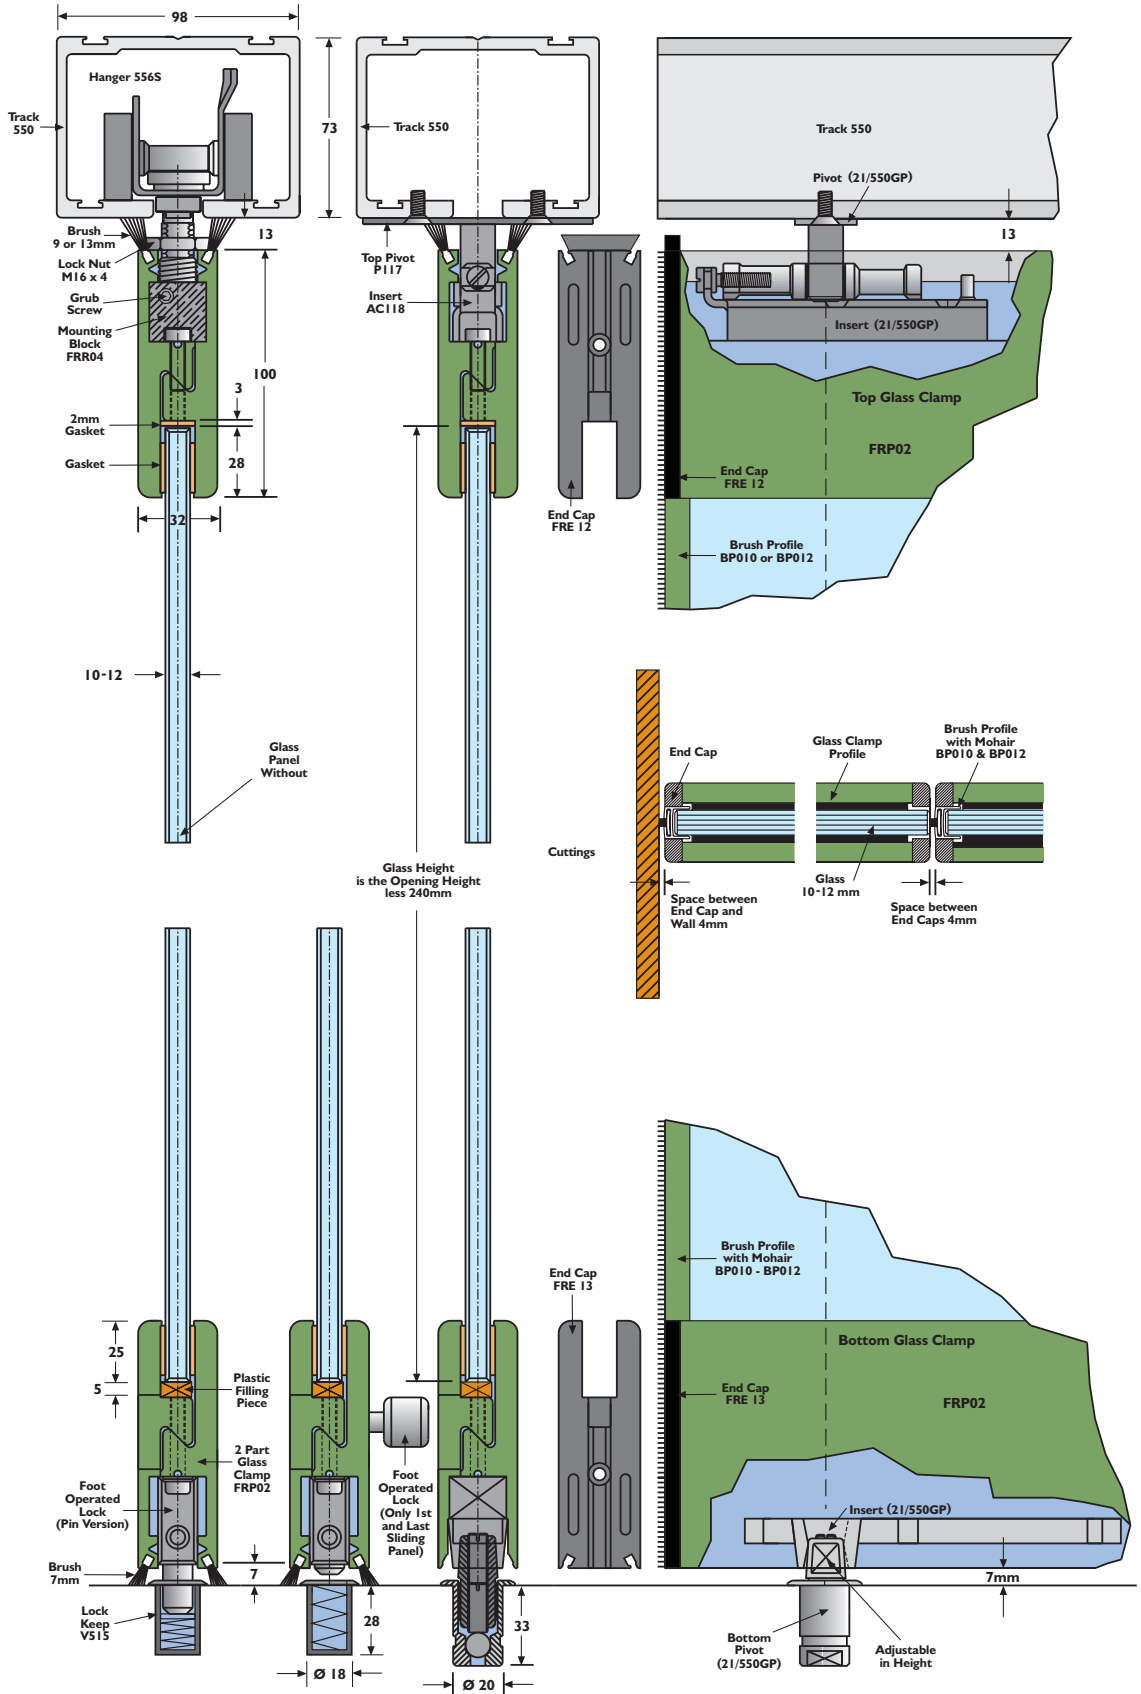

CAPACITY

| | |
|------------------------|--|
| Max. door weight: | 500kg (2 hangers per leaf) 250kg (1 hanger per leaf) |
| Max. door height: | 2800mm-10mm toughened glass 4000mm-12mm toughened glass |
| Max. door width: | 1300mm-10mm toughened glass 1300mm-12mm toughened glass |
| Door thickness: | 10 or 12 mm - toughened glass |
| Max. swing door width: | 1200mm |


APPLICATIONS

Multidirectional Flexirol is ideally suited to hotels, conference centres, shop-fronts, showrooms, any site that requires high performance and the flexibility of 135° movement.

DOOR TYPES

BS6206 toughened glass panels of 10 or 12mm thickness.

Note: when using glass clamps in combination with protective coatings for glass surfaces such as Clear Shield, ensure that the glass surface to be clamped is not treated with the Clear Shield coating.

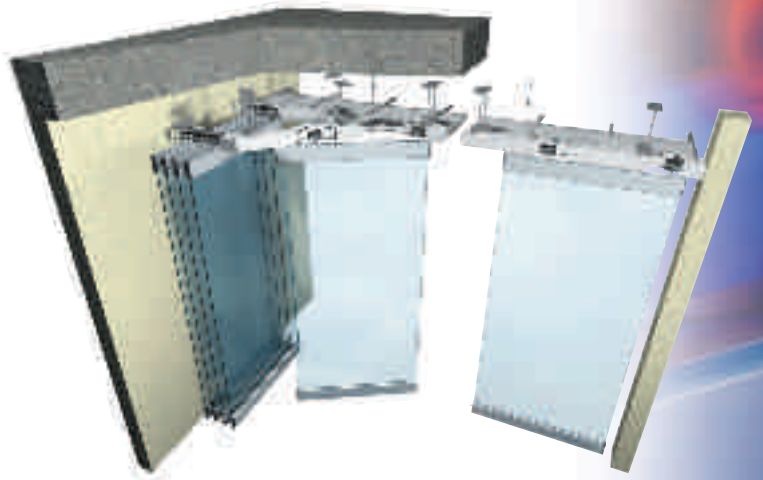

TECHNICAL INFORMATION

| | | | |
|-----------------|---|------------------------------------|----------|
| Track: | 550 (extruded aluminium) | | |
| Brackets: | Face fix | | 1A/550 |
| | Soffit fix | | 3S/550 |
| Glass Profiles: | Top/bottom glass profile | | FRP02 |
| | Swing/slide profile | | FRP01 |
| Pivots: | Glass pivot set | | 21/550GP |
| Accessories: | Track stop | | HH3/301 |
| | Door closers | Floor spring closer | 7410 |
| | | Transom closer | 5600 |
| | | (complete with 400mm of 550 track) | |
| | Swing/sliding floor spring | 7305 | |
| Handle sets | H22/200 D - handle 22mm dia. 200mm long | | |
| | H22/300 D - handle 22mm dia. 300mm long | | |
| | H33/220 D - handle 33mm dia. 220mm long | | |
| | H33/300 D - handle 33mm dia. 300mm long | | |

(Standard handle set finishes are silver anodised and white RAL9010. Other finishes are available on request.)



FLEXIROL 135°

MULTIDIRECTIONAL

SYSTEM FOR GLASS DOORS

